


COLD PLANER BM 2000/60-2

PERFORMANCE DATA

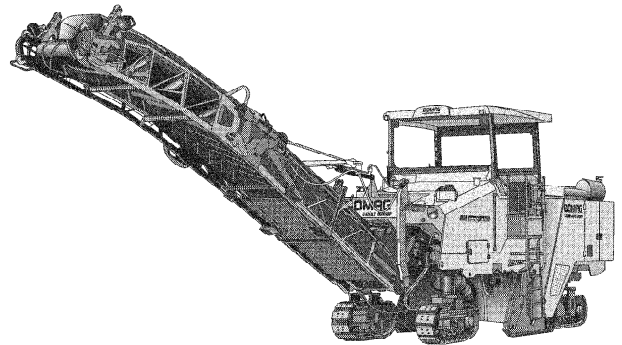


Technical Data

Shipping dimensions in m3

BM 2000/60-2

110,260

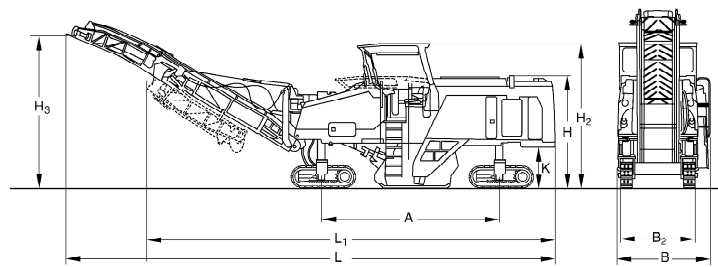

Standard

- Four-track steering front or/and rear, crabwalk
- automatic max. load control
- Differential lock
- Automatic milling depth control "INTELPLANER"
- 2 INTELPLANER Displays
- Slope control with slope sensor
- Hydraulically foldable conveyor belt
- Display of RPM
- Display of engine oil pressure and temperature
- Display of operating hours
- Display of diesel level
- Display of hydraulic oil temperature
- Display of hyd. system pressures
- ground control panels
- Sound insulated engine hood
- 10 removable headlights
- Adjustable water spraying system
- tool box for servicing and maintenance
- Back-up warning signal
- Rotary beacon

Options

- Hydraulically foldable canopy
- canopy with windscreens
- Hydraulically pump for water re-filling
- High pressure cleaner
- Levelling with electromechanical sensor
- Levelling with ultrasound sensor
- Electrical diesel pump for fuel refilling
- compressed air system

Dimensions in mm

	A	B	B2	H	H2	H3	K	L	L1
BM 2000/60-2	4720	2500	1870	2960	3990	4500	1120	14900	12000

Technical Data

Millig drum

Milling width	mm	2.000
Milling depth	mm	0- 320
Milling line distance	mm	15
Cutting circle diameter	mm	1.070
Number of cutting teeth		168
Output per cutting tooth	kW	2,62
Speed	l/min	108

Drive

Engine manufacturer		Deutz
Type		TCD 2015
Cooling		Liquid
Number of cylinders		8
Performance ISO 3046	kW	440
Performance ISO 3046	hp	600
Speed	min-1	1.900
Fuel		diesel
Electric equipment	V	24

Weights

Grossweight	kg	32.500
Operating weight CECE	kg	30.300
Basic weight	kg	28.100

Driving Characteristics

Track radius, inner	mm	2.100
Speed (1)	km/h	5
Working speed, max.	m/min	0- 40

Chassis

Type of chassis		crawler
Width	mm	300
Height	mm	640
Length	mm	1.700

Capacities

Fuel	l	1.200
Water	l	3.500
Hydraulic	l	230

Loading system

Width of gathering belt	mm	800
Length of gathering belt	mm	2.400
Width of loader conveyor belt	mm	800
Length of loader conveyor belt	mm	7.600

Dimensions

Transport dimensions, belt lowered, length	mm	14.900
Transport dimensions, belt lowered, width	mm	2.500
Transport dimensions, belt lowered, height	mm	2.960
Transport dimensions, belt folded, length	mm	12.000

Technical modifications reserved. Machines may be shown with options.



BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090
Fax (0)6742 - 3090

BOMAG
FAYAT GROUP